

AD-A278 047

PAGE

Form Approved  
OMB No. 0704-0188Public report  
gathering or  
collection of  
Data HighwYour per response, including the time for a...ing instructions, searching existing data sources,  
tion of information. Send comments regarding this burden estimate or any other aspect of this  
tion Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson  
ment and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

1-1-94

3. REPORT TYPE AND DATES COVERED

Final Technical Report: 6-1-92 - 12-31-93

4. TITLE AND SUBTITLE

"An Extended Approach to Oxidations and Nitridations of  
Si and Ge Si<sub>1-x</sub> Materials"

5. FUNDING NUMBERS

Grant number:

DAAL03-92-G-0224

Proposal number:

29282-MS

6. AUTHOR(S)

Dr. Ralph J. Jaccodine

Dr. Donald R. Young

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS

Lehigh University  
Sherman Fairchild Laboratory  
16A Memorial Drive East  
Bethlehem, PA 180158. PERFORMING ORGANIZATION  
REPORT NUMBER

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

U. S. Army Research Office

P. O. Box 12211

Research Triangle Park, NC 27709-2211

94-11002



11. SUPPLEMENTARY NOTES

The view, opinions and/or findings contained in this report are those of the  
author(s) and should not be construed as an official Department of the Army  
position, policy, or decision, unless so designated by other documentation.

12a. DISTRIBUTION/AVAILABILITY STATEMENT

Approved for public release; distribution unlimited.

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

The effect of germanium on the hot electron current of metal-oxide-semiconductor devices has been studied by avalanche electron injection from the silicon to silicon dioxide. Different doses of germanium ranging from  $10^{12}$  to  $10^{15}$  atoms/cm<sup>2</sup> are implanted into Si-SiO<sub>2</sub> interface. The "lucky" hot electron population is suppressed by germanium implantation. We have used the charge-voltage technique to measure the interface state density. The interface state density increase caused by Ge implantation is negligible if the dose is lower than  $10^{14}$  Ge/cm<sup>2</sup>.

We have also used different implantation energies to locate the Ge peak at different locations in the Si. We found that when the peak is at Si-SiO<sub>2</sub> interface, the hot electron population is the lowest.

Our results show that Ge implantation is a promising method to solve the hot carrier problem that has become important in submicrometer devices.

DTIC QUALITY INSPECTED 3

14. SUBJECT TERMS

15. NUMBER OF PAGES

16. PRICE CODE

17. SECURITY CLASSIFICATION  
OF REPORT

UNCLASSIFIED

18. SECURITY CLASSIFICATION

UNCLASSIFIED

19. SECURITY CLASSIFICATION  
OF ABSTRACT

UNCLASSIFIED

20. LIMITATION OF ABSTRACT

UL

94 4 11 110

An Extended Approach to Oxidations and  
Nitridations of Si and  $\text{Ge}_x\text{Si}_{1-x}$  Materials

Final Technical Report

Dr. Ralph J. Jaccodine  
Dr. Donald R. Young

February 4, 1994

U.S. Army Research Office

DAAL03-92-G-0224

Lehigh University  
Bethlehem, Pennsylvania 18015

Approved for Public Release  
Distribution Unlimited

DTIC QUALITY INSPECTED 3

<b>Accession For</b>	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	and/or Special
A-1	

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official department of the Army position, policy, or decision, unless so designated by other documentation.

## Final Technical Report

### *STATEMENT OF THE PROBLEM STUDIED*

The effect of germanium on the hot electron current of metal-oxide-semiconductor devices has been studied by avalanche electron injection from the silicon to silicon dioxide. Different doses of germanium ranging from  $10^{12}$  to  $10^{15}$  atoms/cm<sup>2</sup> are implanted into Si-SiO<sub>2</sub> interface. The "lucky" hot electron population is suppressed by germanium implantation. We have used the charge-voltage technique to measure the interface state density. The interface state density increase caused by Ge implantation is negligible if the dose is lower than  $10^{14}$  Ge/cm<sup>2</sup>.

We have also used different implantation energies to locate the Ge peak at different locations in the Si. We found that when the peak is at Si-SiO<sub>2</sub> interface, the hot electron population is lowest.

### *SUMMARY OF THE MOST IMPORTANT RESULTS*

The final effort in this project was extended to finish the work started previously by graduate student Ta-Cheng Lin. This effort had too much promise to be dropped at an incomplete stage. Our judgement is justified by the importance of his findings (see paper included)<sup>1</sup> and indeed should be further investigated in the future.

We have been intrigued by the work of Ng, Pai, Mansfield and Clarke<sup>2</sup> suggesting that the implantation of germanium into the Si-SiO<sub>2</sub> interface can significantly reduce the injection of hot electrons from the silicon into the silicon dioxide. They suggest that the Germanium reduces the hot electron population in the vicinity of the Si-SiO<sub>2</sub> barrier height without having a significant impact on the lower energy carriers that provide the current in an operating device. Since hot electron injection has become an increasingly important consideration for the ultra small devices used in contemporary silicon technology and because

of the addition of the germanium implantation appears to be easily implemented on a production line, we have continued our effort to extend and verify this work.

As we described in the paper that is included, our results on MOS devices using avalanche injection techniques clearly support the results of Ng et al. A very large reduction in the hot electron population is observed which appears even for implanted germanium doses of  $10^{12}/\text{cm}^2$ . As the dose is increased, additional reductions are observed with no observable increase in the interface state density until the dose used is  $10^{14}/\text{cm}^2$ . It is well known that the presence of germanium in the  $\text{SiO}_2$  provides electron traps with a relatively large trapping cross section. For this dose of  $10^{14}/\text{cm}^2$ , the volume concentration in the oxide is becoming large enough to provide enough traps within the tunneling distance of the interface to result in the interface states involved. So it is reasonable to suggest that the interface states are the result of electron tunneling into the germanium electron traps. However, lower concentrations can still provide a very useful result. This suggests a wide range in the applied dose can be considered. The results of this work are so encouraging that we are independently continuing it further to enable us to learn more about the physical mechanisms involved. This holds promise for future device technology.

#### **REFERENCES**

1. Ta-Cheng Lin and D. Young, Appl. Phys. Lett. **62** (26), 1993.
2. Ng, Pai, Mansfield, and Clarke, IEEE Electron Device Letters, 1990.

#### **LIST OF PUBLICATIONS AND TECHNICAL REPORTS**

1. "Effect of Germanium Implantation on Metal-Oxide-Semiconductor Avalanche Injection," Ta-Cheng Lin and Donald R. Young, Appl. Phys. Lett. **62** (26), 1993.

REPORT OF INVENTIONS

No inventions are reported for the time period of this report.

## BIOGRAPHIES

### Dr. Ralph J. Jaccodine

Director, Sherman Fairchild Center for Solid State Studies

#### Education

1947	B.S.	U.S. Naval Academy
1951	M.S.	Physics, Steven Institute of Technology
1957	Ph.D.	Physics, Notre Dame University

#### Positions

Bell Telephone Laboratories (1958-1981)	
1959-61	Member of Technical Staff
1961-68	Supervisor on wide range of crystal growth related studies
1972-78	Department Head of MOS Technology
1978-81	Department Head of Bipolar Technology
1981-	Fairchild Professor of Solid State Materials, Lehigh University

#### Research Activity

Stacking faults and distortion behavior  
Integrated circuits and devices  
Solid state diffusion  
Oxygen precipitation  
Imperfection studies  
IEEE Gel Task Force  
Bipolar technology  
Ion implantation  
MOS technology  
Director, SRC Packaging Program

#### Society Membership

IEEE (senior member)  
Electrochemical Society  
Sigma Xi

Dr. Donald R. Young

Education

1942 B.S.	Utah State Major-Physics; Minor-Mathematics
1949 Ph.D.	Massachusetts Institute of Technology Major-Physics; Minor-Mathematics

Positions

1942-45	Massachusetts Institute of Technology Radiation Laboratory
1945-49	Massachusetts Institute of Technology Laboratory for Insulation Research
1949-86	International Business Machines
1972-73	Sabbatical leave as visiting Mackay Lecturer Electrical Engineering Department University of California
1980-81	Sabbatical leave at Institut fur Halbleitertechnik Technische Hochschule, Aachen, Federal Republic of Germany. U.S. Senior Scientist Award, Alexander von Humboldt Foundation
1982-86	Adjunct Professor, Lehigh University, Bethlehem, PA (with exception of 1984)
1986-	Professor, Lehigh University

Personal Recognition

Fellow American Physical Society, Fellow IEEE  
U.S. Representative on Committee on MIS Systems  
A. von Humboldt Senior Scientist Award 1980  
Chairman, 1982 Gordon Conference on MIS Systems  
Two Outstanding Contribution Awards IBM



## ***APPENDIX***

"Effect of Germanium Implantation on Metal-Oxide-Semiconductor Avalanche Injection," Ta-Cheng Lin and Donald R. Young, Appl. Phys. Lett. **62** (26), 1993.

# Effect of germanium implantation on metal-oxide-semiconductor avalanche injection

Ta-Cheng Lin and Donald R. Young

Sherman Fairchild Center, Lehigh University, Bethlehem, Pennsylvania 18015

(Received 1 March 1993; accepted for publication 15 April 1993)

The effect of germanium on the hot electron current of a metal-oxide-semiconductor device has been studied by avalanche electron injection from the silicon to the silicon dioxide. Different doses of germanium ranging from  $10^{12}$  to  $10^{15}$  atoms/cm<sup>2</sup> are implanted into the Si-SiO<sub>2</sub> interface. The "lucky" hot electron population is suppressed by the germanium implantation. We have used the charge-voltage technique to measure the interface state density. The interface state density increase caused by the Ge implantation is negligible if the dose is lower than  $10^{14}$  Ge/cm<sup>2</sup>. Our results show that the Ge implantation is a promising method to solve the hot carrier problem that has become important in submicrometer devices.

One of the physical phenomena in silicon metal-oxide-semiconductor field-effect-transistor (MOSFET) structures that is becoming increasingly important for ultra-small devices is the emission of hot electrons from the silicon substrate into the silicon dioxide insulating layer. The trapping of the hot carriers in the silicon dioxide induces device degradation and instability. Several approaches<sup>1-4</sup> have been proposed to circumvent this problem. One method recently presented by Ng *et al.*<sup>5</sup> is to introduce neutral atoms in the MOSFET channel region to suppress or eliminate the hot carrier population. They observed a decrease in the degradation rate of MOSFETs resulting from the presence of Ge in the channel. They also observed that the device operating characteristics are not degraded and they claimed that the germanium introduces an additional scattering mechanism for the lucky hot electrons.

In this work, we investigate the effect of germanium on the hot electron injection using MOS devices. Different doses of germanium are implanted into the Si-SiO<sub>2</sub> interface of MOS structures. We use the avalanche injection technique<sup>6</sup> to generate hot electrons in the substrate. The injection current and the corresponding peak avalanche voltage are monitored for each sample. Our observations indicate a reduction in the injected current resulting from the presence of germanium. The experimental results and discussion will be presented later. We also use the charge-voltage (*Q-V*) technique<sup>7</sup> to investigate the effect of Ge on the interface state density for each sample.

*p*-type, 0.1–0.2 Ω cm, (100) wafers are used as a substrate. All wafers are RCA cleaned before oxidation. The oxide is grown in a dry oxidation furnace at 1000 °C for 50 min. After oxidation, one half of each wafer is implanted with germanium. The doses are  $10^{12}$ ,  $10^{13}$ ,  $10^{14}$ , and  $10^{15}$  atoms/cm<sup>2</sup> at an energy of 95 keV. The other nonimplanted half is the control sample to be compared with the implanted half. After implantation, samples are annealed for 30 min in a N<sub>2</sub> ambient at 950 °C to eliminate implantation damage. Aluminum gates are deposited on top of the wafers using evaporator. The gate area of 0.01 cm<sup>2</sup> is defined by photolithography. Finally, the devices receive a

400 °C, 30 min post-metallized annealing in a forming gas (20% H<sub>2</sub>, 80% N<sub>2</sub> mixture).

The densities of the interface traps for each sample were analyzed by the *Q-V* technique.<sup>7</sup> The effect of germanium implantation on the interface state densities will be given later.

Avalanche injection has been described respectively by Young and Nicollian<sup>8,9</sup> in their previous papers as a means to induce a current flow in the oxide. Figure 1 shows the band diagram of the MOS structure under avalanche condition. The MOS capacitor is driven to deep depletion and carriers in the silicon substrate are accelerated by the applied electric field. These hot carriers have sufficient energy for impact ionization to occur. Thus, electron hole pairs are created in the depletion layer. The lucky hot electrons that have enough energy to surmount the interfacial barrier enter the SiO<sub>2</sub> to produce an electron current. Thus, by observing the injection current, we can study the hot electron effect in MOS devices. In this work, the injection current and the corresponding applied voltage are carefully

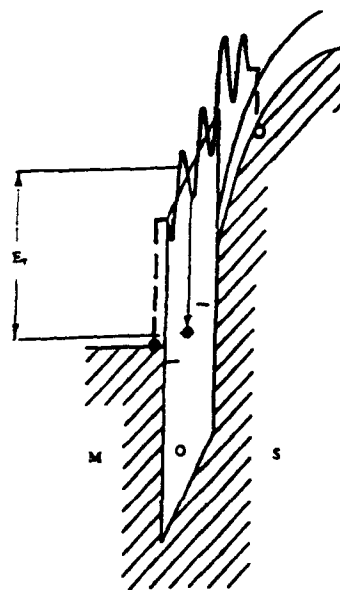


FIG. 1. The energy band diagram of a *p*-type MOS capacitor for semiconductor avalanche emission under large positive bias.

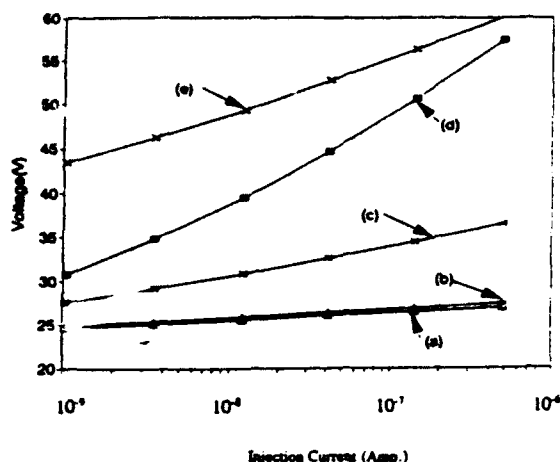


FIG. 2. Avalanche injection voltage vs current for all samples. Electrons were injected from silicon substrate. (a) Control, (b)  $10^{12}$  Ge/cm $^2$ , (c)  $10^{13}$  Ge/cm $^2$ , (d)  $10^{14}$  Ge/cm $^2$ , and (e)  $10^{15}$  Ge/cm $^2$ .

recorded for each sample. The result will be presented later.

Figure 2 shows the voltage versus injection current curves for each sample. We observed the voltage required to produce a given current increases for the Ge implanted samples. The  $10^{15}$  Ge/cm $^2$  sample has the highest voltage increase and the voltage goes down as the Ge concentration is decreased. When the dose is  $10^{12}$  Ge/cm $^2$ , the germanium has almost no effect on the voltage. The increase in avalanche voltage required for a given current demonstrates a decrease in the injection current for the same voltage. Based on the above observation, we conclude that this is a large reduction in the hot electron population in the silicon substrate as a result of the germanium. The reduction in hot electron population is due to additional scattering mechanisms. The added scattering may be caused by the larger atom size of Ge or by a disturbance of the band structure.

The interface state densities at midgap of all samples are shown in Fig. 3. It is evident that  $D_{it}$  does not increase until the germanium dose is higher than  $10^{14}$  Ge/cm $^2$ . The increase in the interface state density was probably caused by the implantation damage. This result suggest that we keep the dose below  $10^{14}$  Ge/cm $^2$  to avoid the  $D_{it}$  increase.

In this work, we have observed a reduction in the hot electron population in a Si substrate as a result of germa-

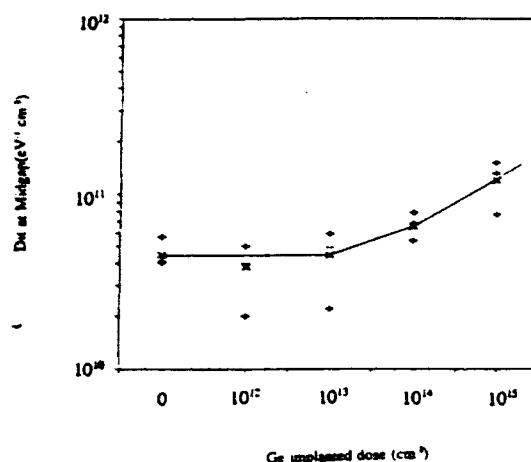


FIG. 3. Ge implanted dose dependence of interface state density at midgap. For each sample, "+"s are the measured  $D_{it}$ , "x" is the average  $D_{it}$ .

nium implantation into the interfacial region. This reduction in hot electron population would lower the degradation rate of MOSFETs. Our results agree with Ng's experiment. In the range of our study, the more Ge we have in the interface the lower the hot electron population. On the other hand, when the germanium dose is higher than  $10^{14}$  Ge/cm $^2$ , the interface state will increase. So the optimistic dose, which reduces the hot electron population without increasing the interface state density, in this study is  $10^{14}$  Ge/cm $^2$ .

This work is supported by a grant from Army Research Office (DAAL03-92-G-0224). The authors would like to thank Professor Ralph Jacodine of Lehigh University for supporting this work and J. H. Kung for help in making the samples.

<sup>1</sup> P. J. Write, M. Wong, and K. C. Saraswat, IEDN Tech. Dig. 574 (1987).

<sup>2</sup> K. K. Ng and W. T. Lynch, IEEE Trans. Electron Devices ED-34, 503 (1987).

<sup>3</sup> S. Ogura, P. J. Tsang, W. W. Walker, D. L. Critchlow, and J. F. Shepard, IEEE Trans. Electron Devices ED-27, 1359 (1980).

<sup>4</sup> E. Takeda, H. Kume, T. Toyabe, and S. Asai, IEEE Trans. Electron Devices ED-29, 611 (1982).

<sup>5</sup> K. K. Ng, C. S. Pai, W. M. Mansfield, and G. A. Clarke, IEEE Electron Device Lett. 11, 45 (1990).

<sup>6</sup> T. H. Ning, Solid-State Electron. 21, 273 (1978).

<sup>7</sup> T. C. Lin and D. R. Young, J. Appl. Phys. 71, 3889 (1992).

<sup>8</sup> E. H. Nicollian and J. R. Brews, MOS Physics & Technology (Wiley, New York, 1982) p. 378.

<sup>9</sup> D. R. Young, J. Appl. Phys. 52, 4090 (1981).